

High-Production Screed For Slabs & Bridge Decks



CL-102103-D-12

- Introducing the revolutionary high-production, truss-mounted screed, for paving of bridge decks, flat slabs, and concrete floors.
- The new GOMACO screed can advance as much as four feet (1.22 m) in a single pass to drastically reduce your finishing time, providing savings in your concrete delivery cost and total project labor.
- The leading auger is 5.7 feet (1.74 m) long and provides high-production strike-off action and reduces the number of puddlers you need out in front for the project.
- The five foot (1.52 m) long finishing cylinder compacts and finishes the concrete in a single pass.
- The six foot (1.83 m) trailing screed provides the final finish to the surface with a unique GOMACO-designed vibratory system.
- The GOMACO high-production screed with a patent pending design for tilt and skew is mounted to our C-450 truss system.
- This is instrumental in the optional 3D package available for the high-production screed to finish to a 3D model design.
- The new screed system now allows you to economically finish city streets, concrete floors, bridge decks, tunnels, and canals at widths up to 104 feet (31.7 m).
- GOMACO was founded to manufacture bridge deck finishing equipment and continues to be "Dedicated to Concrete - Dedicated to You" and continues the work to advance bridge deck and flat slab technology.

GOMACO[®]

The Worldwide Leader in Concrete Paving Technology



CL-072101-D-08


The revolutionary high-production screed has an auger, finishing cylinder, and trailing screed in series to finish the concrete in one pass.



CL-111912-D4



CL-111916-D17

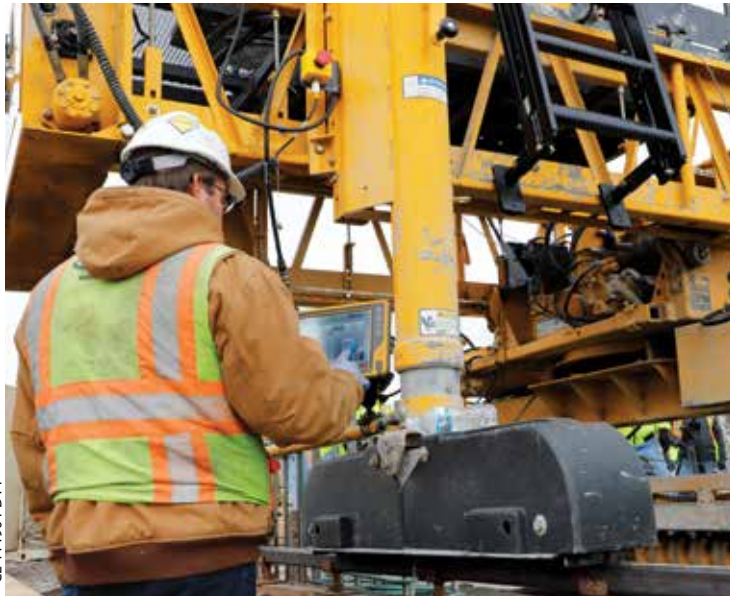

CL-111904-D14

The C-450 and high-production screed can be controlled by a touchscreen on ground level. With the operator being at ground level, they can view exactly what the machine and high-production screed is producing so they can control how far to advance it or what changes need made during the paving process.



CL-111919-D14

Two ready-mix trucks feed a concrete pump providing the C-450 and high-production screed with a constant supply of concrete to finish this 21 inch (533 mm) deep bridge project.

Manufactured under one or more of the following U.S. or foreign patents: 6,450,048; 7,044,680; 7,284,472; 7,517,171; 7,845,878; 7,850,395; CA2,864,902; CA2,591,177; 8,855,967; 8,682,622; 9,051,696; 9,180,909; 9,200,414; 9,404,228; 9,428,869; 9,458,581; 9,464,716; 9,541,195; 9,567,715; 9,624,626; 9,637,872; 9,644,328; 9,633,162; 9,670,627; 9,739,019; 9,764,762; 9,869,063; 9,982,399; 9,963,836; 10,005,489; 10,206,016; 11,060,245; AU2018100400; AU2019100743; and patents pending.

GOMACO and G+ are registered trademarks of GOMACO Corporation.

GOMACO Corporation reserves the right to make improvements in design, material, and/or changes in specifications at any time without notice and without incurring any obligation related to such changes. Performance data is based on averages and may vary from machine to machine.

Printed in U.S.A. © 2021 (11 GOMACO Corporation)

Worldwide Headquarters

GOMACO Corporation
PO Box 151
Ida Grove, IA USA 51445
Ph: 1-712-364-3347
www.gomaco.com
E-mail: info@gomaco.com

European Headquarters

GOMACO International Ltd.
Units 14 & 15
Avenue One, Station Lane
Witney, Oxon, OX28 4XZ, United Kingdom
Ph: 44-1993-705100
E-mail: pavinguk@gomaco.com



GOMACO Corporation's Quality Management System Is
ISO 9001 Certified By The American Systems Registrar.

Quality Policy: We Shall Meet Or
Exceed Our Customers' Expectations.

